

# Impact Bit Socket

KT No. & D1




1. Air pressure must not exceed 90PSI (6.3bar)
2. Adjust your air tool to its lowest torque output, should this torque level not be enough, increase it gradually

1740



409616M 1/2"

- Hex bit & bit holder
- DIN 3121

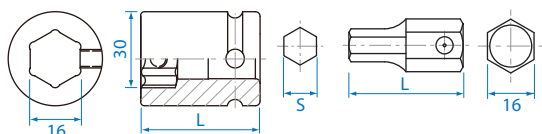

KT NO.	S mm	L mm	Max. torq Nm	g	Box/Pkg
174010H	H10	40	264.0	46	20 / 400
174012H	H12	40	480.0	52	20 / 400
174014H	H14	40	684.0	60	20 / 200
174017H	H17	40	680.0	73	20 / 200
174019H	H19	40	680.0	80	20 / 200
174022H	H22	40	680.0	97	12 / 120
409616M	16	38	680.0	145	10 / 160

4065M

1/2"

- Hexagon head
- DIN 3121



KT NO.	mm	L mm	Max. torq Nm	g	Box/Pkg
406504M	H4	100	20.8	96	6 / 120
406505M	H5	100	36.0	97	6 / 120
406506M	H6	100	62.4	98	6 / 120
406508M	H8	100	144.0	110	6 / 120
406510M	H10	100	264.0	150	6 / 120
406512M	H12	100	480.0	170	6 / 120
406514M	H14	100	650.0	190	6 / 120

4075M

1/2"

- Hexagon head
- DIN 3121



KT NO.	mm	L mm	Max. torq Nm	g	Box/Pkg
407505M	H5	150	36.0	115	6 / 120
407506M	H6	150	62.4	125	6 / 120
407508M	H8	150	144.0	145	6 / 120
407510M	H10	150	264.0	185	6 / 120
407512M	H12	150	480.0	225	6 / 120
407514M	H14	150	650.0	250	6 / 120

# Impact Accessory

4147

1/2"

- Bit holder
- DIN 3121



KT NO.	Size	Overall length mm	g	Box/Pkg
414708S	1/4"	48	69	12 / 216
414710S	5/16"	48	70	12 / 216
414710M	10 mm	48	72	12 / 216

414A08S

1/2"

- Quick-release
- Bit holder
- DIN 3121



KT NO.	Size	Overall length mm	g	Box/Pkg
414A08S	1/4"	51.2	93.6	10 / 180

4260P

1/2"

- Extension bar
- DIN 3121



KT NO.	Overall length inch	Overall length mm	g	Box/Pkg
4260-03P	3	75	197	4 / 80
4260-04P	4	100	255	4 / 80
4260-05P	5	125	277	2 / 40
4260-06P	6	150	340	4 / 80
4260-08P	8	200	423	4 / 48
4260-10P	10	250	452	4 / 48
4260-12P	12	300	595	2 / 40
4260-16P	16	400	746	2 / 20